




★ XB-M60



Product Feature

- Can interpret various 1D/2D codes and Support Chinese direct transmission of QR code
- USB Bluetooth Receiver supports plug and play, easy to set up and quickly match
- Wireless Bluetooth transmission distance: 20 meters (open area)
- 512,000 characters can be stored in offline/inventory storage mode
- Can be paired directly with Bluetooth-enabled mobile phones, tablets, and laptops

Product Size

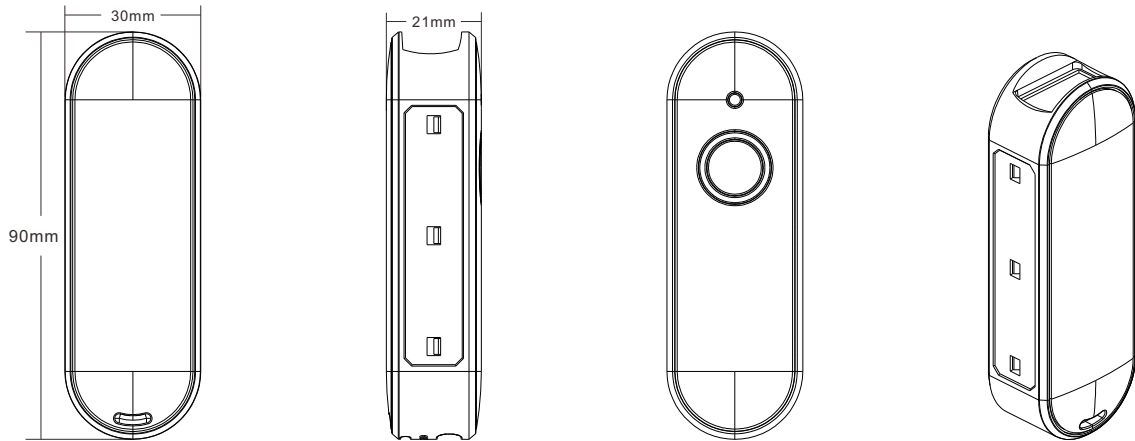

Specification

Performance Parameters	
Light Sources:	617nm LED Aimer, White LED
Supported Symbologies:	1D: CODE128,EAN-13, ISBN, ISSN, EAN-8, UPC-A, UPC-E, Code 39, Code 39 Full ASCII, Codabar, Code 93, Interleaved 2 of 5, Industrial 2 of 5, IATA 2 of 5, Matrix 2 of 5, Code 11, MSI Plessey, GS1 128, code32 2D: QR Code, Data Matrix, PDF417, Micro PDF417, Aztec Code, Micro QR.
Scanning principle:	Image CMOS
Resolution:	640*480
Scan Mode:	Manual/Continuous/Automatic Induction Scanning
Precision:	≥4mil
Scan Angle:	Yaw±55°, Rotation 360°, Pitch±55°
Contrast:	≥20%
Depth of scan field:	30-230mm(EAN13 13mil 90%PCS)
Error Rate:	Less than 1/5million
Error Rate:	1/5million
Wireless Communication:	Pairing Mobile Bluetooth Devices: Bluetooth BLE 4.0
Wireless transmission distance:	20meters (open distance)
Storage Mode:	Offline Storage Mode: When the scanner exits the connection range, the data is automatically stored.Storage capacity is 512000 characters. Inventory storage mode: Scanner can enter inventory mode, storage capacity is 512000 characters.
Pairing Mode:	One to One: One scanner paired with a Bluetooth mobile device

Environmental Parameters	Physical Parameters
Operating Temperature: -20℃~50℃	Dimensions: 90mm*30mm*21mm
Storage Temperature: -40℃~70℃	Material: ABS+PC
Relative Humidity: 5% ~95% RH(Non-condensing)	Cable Length: 0.8M
Ambient lighting: 0~100000LUX	
Shock Resistance: Withstands multiple times 1.2 meters drops to concrete	
Electronic Parameters	
Working Voltage: DC5V±5%	Charging Time: 2.5h
Lithium Battery: 800mA	Battery Working: 4h
Maximum Operating Current(MAX): 170mA	
Standby Current: 0mA(Standby is to cut off battery power)	
Charging Model: Square USB charging cable, plug straight charge	

Application

