




★ XB-PS80H



Product Feature

- New decoding chip, interpretation of various 1D & 2D barcode
- Professional technology, can scan WeChat/alipay bar code
- Plug and play, simple setup, fast use
- Power indicator on the botton
- Wire life more durable

Product Size

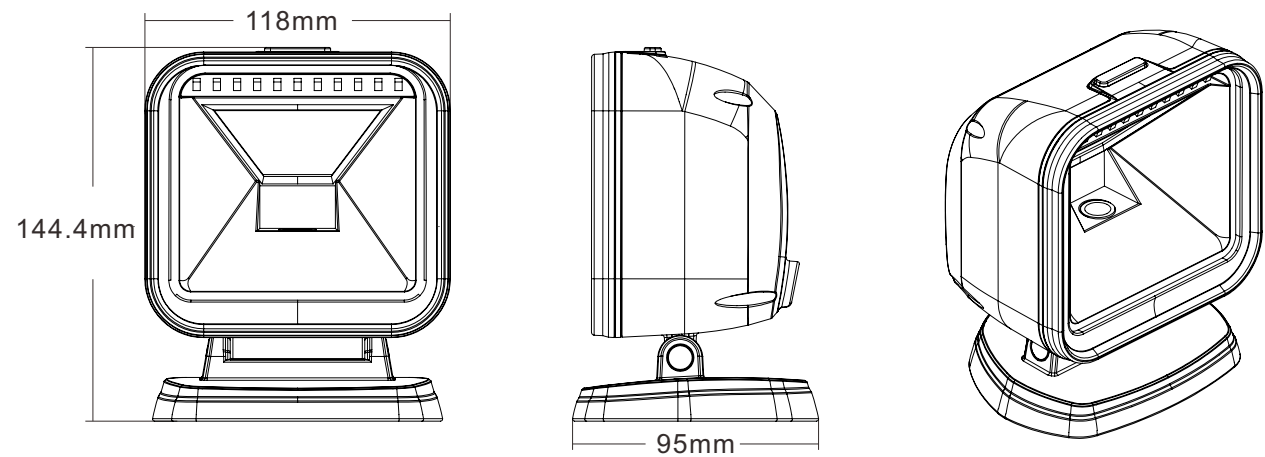

Specification

Performance Parameters	
Ligth Source:	Red LED
Supported Symbolologies:	1D: Codabar, Code 39, Code 32, Interleaved 2 of 5, NEC 2 of 5, Code 93, Straight 2 of 5, Industrial 2of 5, Straight 2 of 5 IATA, Matrix 2 of 5, Code 11, Code 128, ISBT 128, GS1-128, UPC-A, UPC-E0, UPC-E1, EAN/JAN-13, EAN/JAN-8, ISBN, MSI, GS1 DataBar-Omnidirectional, GS1 DataBar Limited, GS1 DataBar Expanded. 2D: PDF417, QR code, DataMatrix, Aztec Code, China Post, HongKong 2 of 5, Korea Post, Han Xin code, Maxi code, Micro PDF417, GS1 Composte coders, Codablock A, Codablock F.
System compatibility:	Linux, Android, Windows XP/7/8/10
Scan Range:	10mm-150mm(EAN 13 13mil, PCS=90%)
Print Contrast:	20% minimum reflective difference
Minimum recognition accuracy:	Code 39 4mil
Motion Tolerance:	4 meters/second
Scan Mode:	Automatic Induction Scanning
Image (Pixels):	1280 pixels(H) x 800 pixels(V)
Man-machine Interaction:	Indicator light: Blue light power indicator; Blue light flashing code reading prompt, Buzzer: start prompt, read code prompt.
Recognition angle range:	Turn $\pm 360^{\circ}$, Elevation $\pm 65^{\circ}$, Declination $\pm 65^{\circ}$
Interface:	USB(Drive-Free), RS232, USB-COM

Physical Parameters	Electronic Parameters
Dimensions: 118mm*95mm*144.4mm	Working Voltage: DC5V $\pm$ 5%
Weight: 390g	Current: Standby Current 190mA; Working Current 240mA
Material: ABS+PC	
Cable Length: 1.8M	

Environmental Parameters
Operating Temperature: -20 $^{\circ}$ C~60 $^{\circ}$ C
Storage Temperature: -30 $^{\circ}$ C~70 $^{\circ}$ C
Relative Humidity: 0% ~95% RH (non-condensing/non-freezing)
Shock Resistance: Withstands multiple times 1.5 meters drops to concrete

Application

