

AIO INDUSTRIAL COMPUTER

Model SK-15.6GB



Features

- Industrial 15.6" IPS LCD with 50K Lifetime LED Backlight
- Intel® 4415U with 4GB DDR4 64G SSD
- Supports wide operating temperatures -10~60°C
- IP65 certified front panel protection
- 10 Point Capacitive G+G Touch Screen

senke®

Introduction

The SK-15.6GB AIO INDUSTRIAL COMPUTER with a 15.6" IPS LCD screen, low power embedded Intel® 4415U with 4GB DDR4 64G SSD provides computing performance in a compact system. To enhance its durability, the SK-15.6GB is designed with IP65 front protection, aluminium front bezel and 10 point Capacitive G+G touch screen. It supports wide operating temperatures -10~60°C and includes full size mini-PCIe slot to extend the functionality and meet a variety of automation applications needs.

Specifications

General

Certification	CCC, CE, FCC, ISO9001
Cooling system	fan
Dimensions	400.2x 254.2 x 46 mm (Wall mount bracket exclude)
Enclosure front bezel	Front bezel : cold rolled steel plate Back housing : cold rolled steel plate
Mounting	Default wall mounting bracket
OS support	Windows 10 Pro English trial version
Optional color	Silver or black
Weight (Net)	4.5 kg
Weight (Gross)	5.5 kg
Package size	45*14*33 cm

System Hardware


CPU	Intel® 4415U
Memory	4GB
Storage	64GB
Expansion Slots	Full-size Mini PCI-E/SIM , Support WIFI/4G
LAN	Realtek RTL8111H Gigabit Ethernet

I/O

DC X1 24V
HDMI x1
USB x4
LAN x1 (RJ-45)
Mic-in x1
Line-out x1
Customized Interface available

Drawing

Unit (mm)

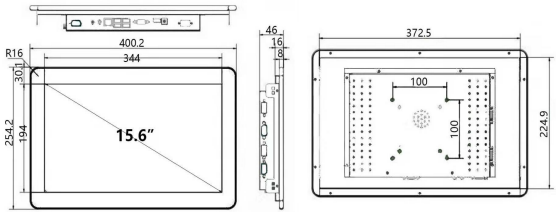

LCD Display

Display type	IPS LCD screen
Display size	194 × 344 mm (H×V)
Resolution	1920 × 1080
Max. colors	16.7 M
Luminance cd/m²	250
Viewing angle (H/V°)	178°/178°
Backlight life	50000 hrs
Contrast ratio	700:1
Aspect ratio	16:9
Lifespan	36 million touches at single point
Touch type	10 Point Capacitive G+G touch screen
Response	≤5 ms

Environment

Humidity	0~ 95% RH @ 40°C, non-condensing
Ingress Protection	Front panel: IP65
Operating Temperature	-10 ~ 60°C
Storage Temperature	-30 ~ 70°C

Accessories

Adaptor (DC 12V) (cable 1 meter)
Power plug (cable 1.2 meter)
Default wall mounting bracket



Multiple installation mode

