





★ XB-D60



Product Feature

- Support various barcodes such as WeChat and Alipay
- New decoding chip for interpreting various 1D and 2D barcodes
- Support Chinese direct transmission of QR code
- Plug and play, easy to set up and quickly match
- Wire life more durable

Product Size

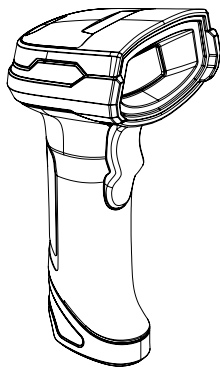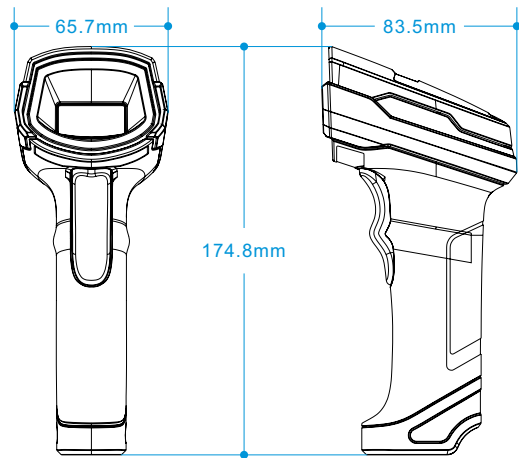

Specification

Performance Parameters	
Light Sources:	(Aimer) Green LED, (Illumination)White color LED
Supported Symbolologies:	1D: Codabar, Code 39, Code 32 Pharmaceutical(PARAF), Interleaved 2 of 5, NEC 2 of 5, Code 93, Straight 2 of 5 Industrial, Straight 2 of 5 IATA, Matrix 2 of 5, Code 11, Code 128, GS1-128, UPC-A, UPC-E, EAN/JAN-8, EAN/JAN-13, MSI, GS1 DataBar Omnidirectional, GS1 DataBar Limited, GS1 DataBar Expanded, China Post(Hong Kong 2 of 5), Korea Pos. 2D: Codeblock A, Codeblock F, PDF417, Micro PDF417, GS1 Composite Codes, QR Code, Data Matrix, MaxiCode, Aztec, HANXIN.
Image (Pixels):	640pixels (H) x 480 pixels (V)
Field of View:	39°(Horizontal), 29°(Vertical)
Print Contrast:	20% minimum reflective difference
Motion Tolerances:	> 1m/s
Scan Angle:	Yaw±65°, Rotation 360°, Pitch±65°
Depth of scan field:	Code39(5mil): 7-16cm, Code39(13mil): 7-32cm QR code (15mil): 3-18cm, Code128(20mil): 6-35cm
Error Rate:	1/5million
Interface:	USB, USB-COM,RS232

Physical Parameters	
Dimensions:	83.5mm*65.7mm*174.8mm
Material:	ABS+PC
Cable Length:	2M

Environmental Parameters	
Operating Temperature:	-20°C~60°C
Storage Temperature:	-30°C~70°C
Relative Humidity:	5% ~95% RH(Non-condensing)
Ambient lighting:	0~100000LUX

Electronic Parameters	
Working Voltage:	DC5V±5%
Operating Current:	300mA
Standby Current:	35mA

Application

