


TS80

Panel Printer

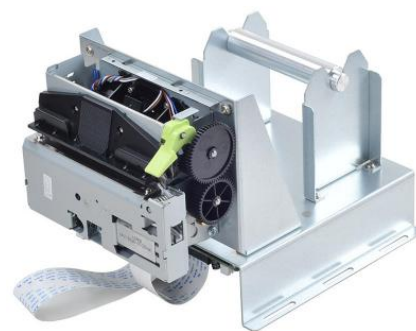

Model	TS80
Printing method	Direct thermal
Print width	72mm
Paper width	79.5±0.5mm
Column capacity	576 dots/line
Printing speed	200 mm/s Max.
Interface	USB+Serial
Line spacing	3.75mm(Adjustable by commands)
Column number	80mm paper: Font A - 42 columns or 48 columns/ Font B - 56 columns or 64 columns/ Chinese,traditional Chinese - 21 columns or 24 columns
Character size	ANK, Font A: 1.5×3.0mm (12×24 dots) Font B: 1.1×2.1mm (9×17 dots) Chinese,traditional Chinese: 3.0×3.0mm (24×24 dots)
Barcode Character	
Extension character sheet	PC347 (Standard Europe)、Katakana、PC850 (Multilingual)、PC860 (Portuguese)、PC863 (Canadian-French)、PC865 (Nordic)、West Europe、Greek、Hebrew、East Europe、Iran、WPC1252、PC866 (Cyrillic#2)、PC852 (Latin2)、PC858、IranII、Latvian、Arabic、PT151 (1251)
Barcode types	UPC-A/UPC-E/JAN13 (EAN13) /JAN8 (EAN8) /CODE39/ITF/CODABAR/CODE93 / CODE128
2D barcode	QR code
Input buffer	4096 k bytes
NV Flash	256 k bytes
Power	
Power source	Output: DC 24V/2.5A
Cash drawer output	DC 24V/1A
Physical characteristics	
Weight	1.8 KG
Dimensions	202.7 ×158×140 mm (D×W×H)
Environmental Requirements	
Operation environment	Temperature(0~45℃) humidity: (10~80%)RH
Storage environment	Temperature(-10~60℃) humidity: (10~90%)RH
Reliability	
Cutter life	1 million cuts
Printer head life	100 km