




★ XB-7120



Product Feature

- New decoding chip, interpretation of a variety of 1D & 2D barcode
- Professional technology, can scan WeChat/alipay bar code
- Embedded structure to save more space
- Scan fine bar code, fast and accurate
- Plug and play, simple setup, fast use

Product Size

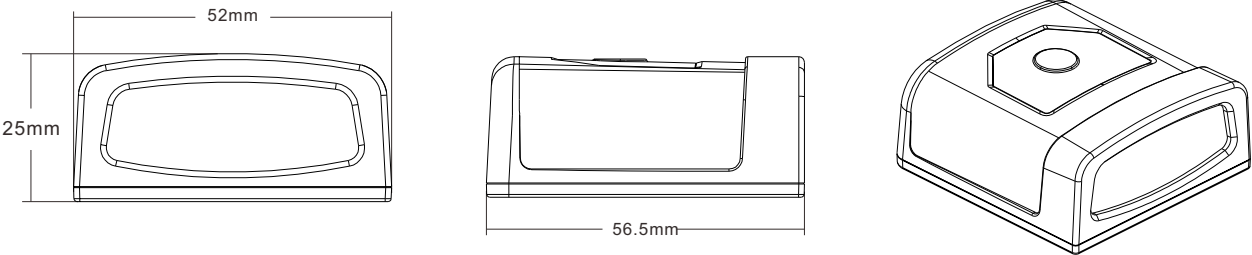

Specification

Performance Parameters	
Sensor:	617nm LED Aimer, White LED
Supported Symbologies:	1D: Code 128, EAN-13, EAN-8, UPC-E, UPC-A, ISBN, ISSN, Code 11, Interleave 2 of 5, Code 39, Code 93, Code 32, Codabar, Matrix 2 of 5, Industrial 25, IATA25, MSI Plessey, GS1 Databar, Plessey, Febraban, Composite Code. 2D: QR Code, Micor QR, Data Matrix, PDF417, Micor PDF417, Aztec, Maxicode, Hanxin Code, Dotcode.
Scan Type:	Image CMOS
Resolution:	640*480
Scan Mode:	Manua / Automatic Induction Scanning
Button:	Trigger button
Scan Angle:	Yaw ±45°, Rotation 360°, Pitch ±45°
Precision:	≥4mil
Bit Depth of field:	35mm-330mm (EAN13 13mil)
Field of View:	Horizontal 55°, Vertical 42°
Error Rate:	Less than 1/5million
Prompt mode:	LED, Speaker
Interface:	USB-HID, USB-COM, RS232

Physical Parameters	
Dimensions:	52mm*56.5mm*25mm
Weight:	60g
Material:	ABS+PC

Environmental Parameters	
Operating Temperature:	-20°C~60°C
Storage Temperature:	-40°C~70°C
Relative Humidity:	5% ~95% RH(Non-condensing)
Ambient Lighting:	0~100000LUX
Shock Resistance:	Withstands multiple times 1.5 meters drops to concrete

Electronic Parameters	
Voltage:	DC5V±5%
Current:	70mA

Application

